

1/10



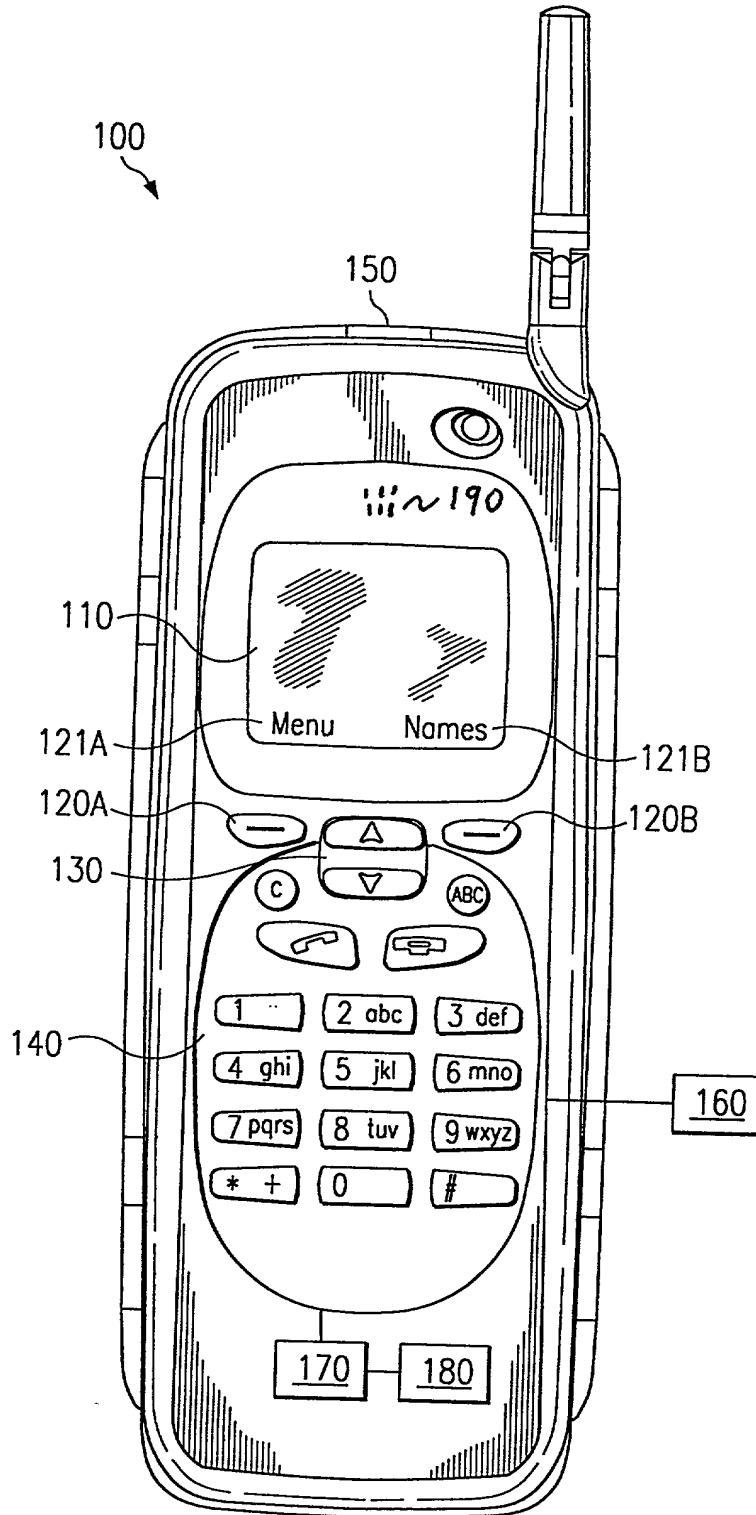


FIG. 1

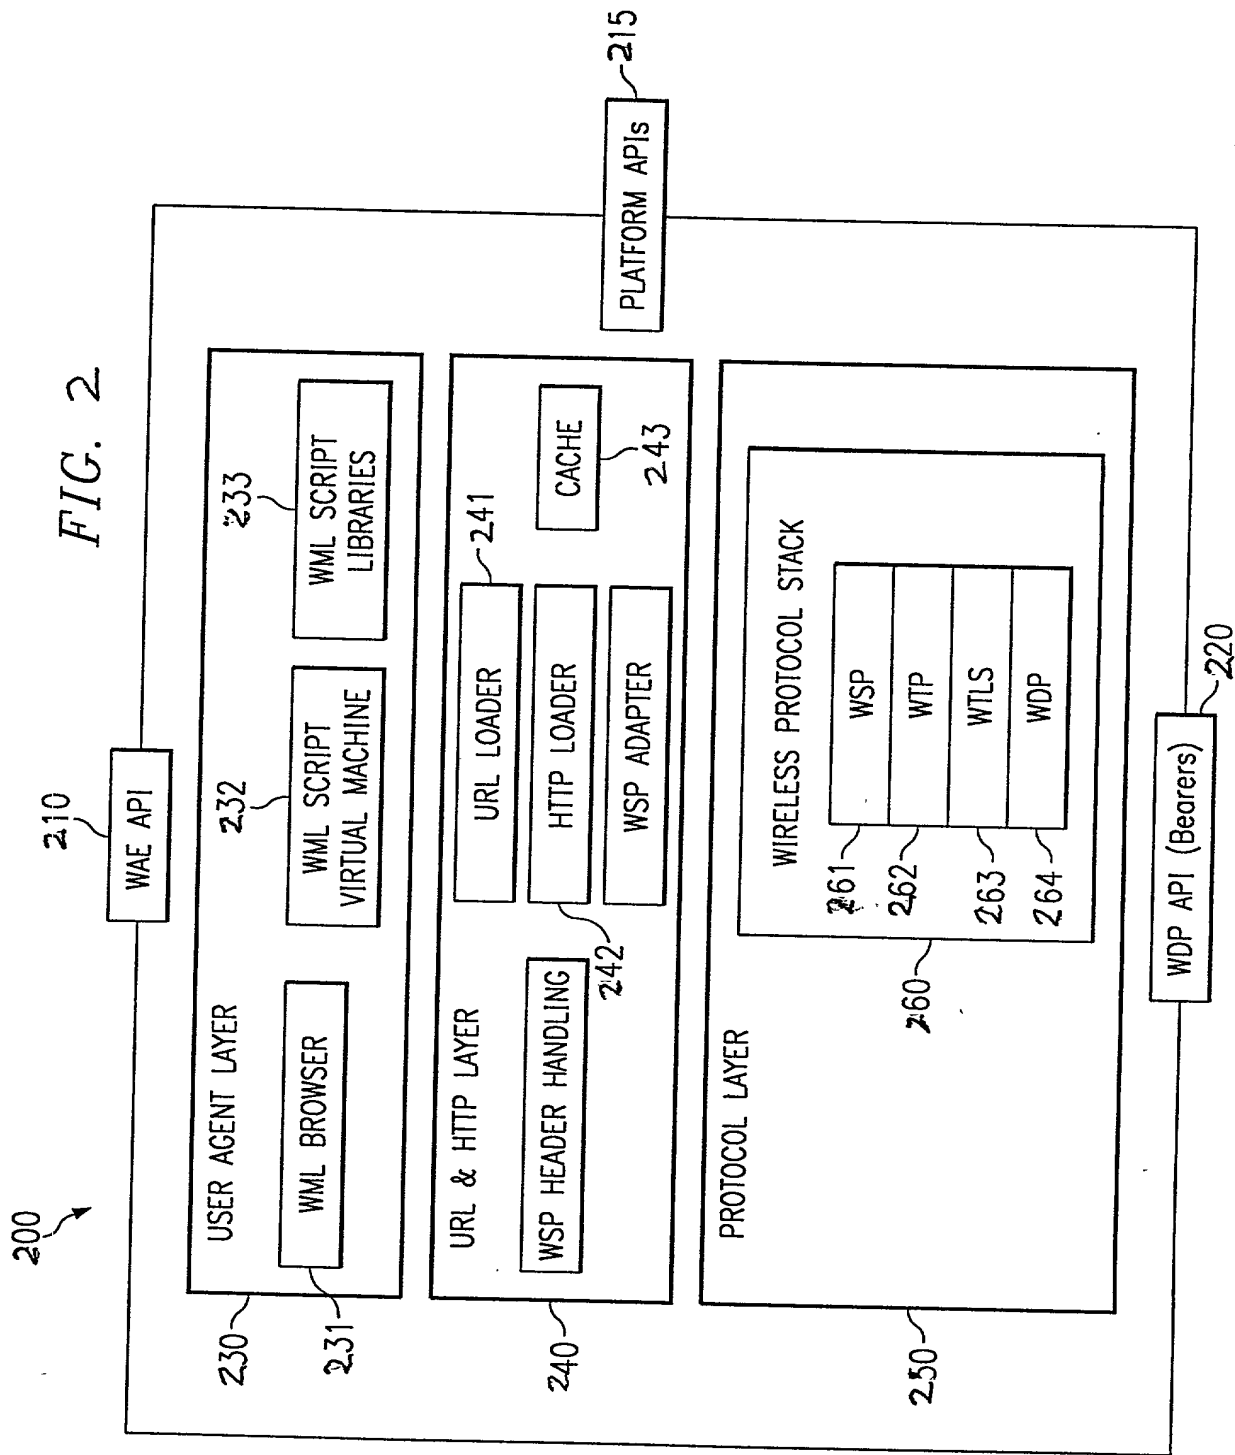

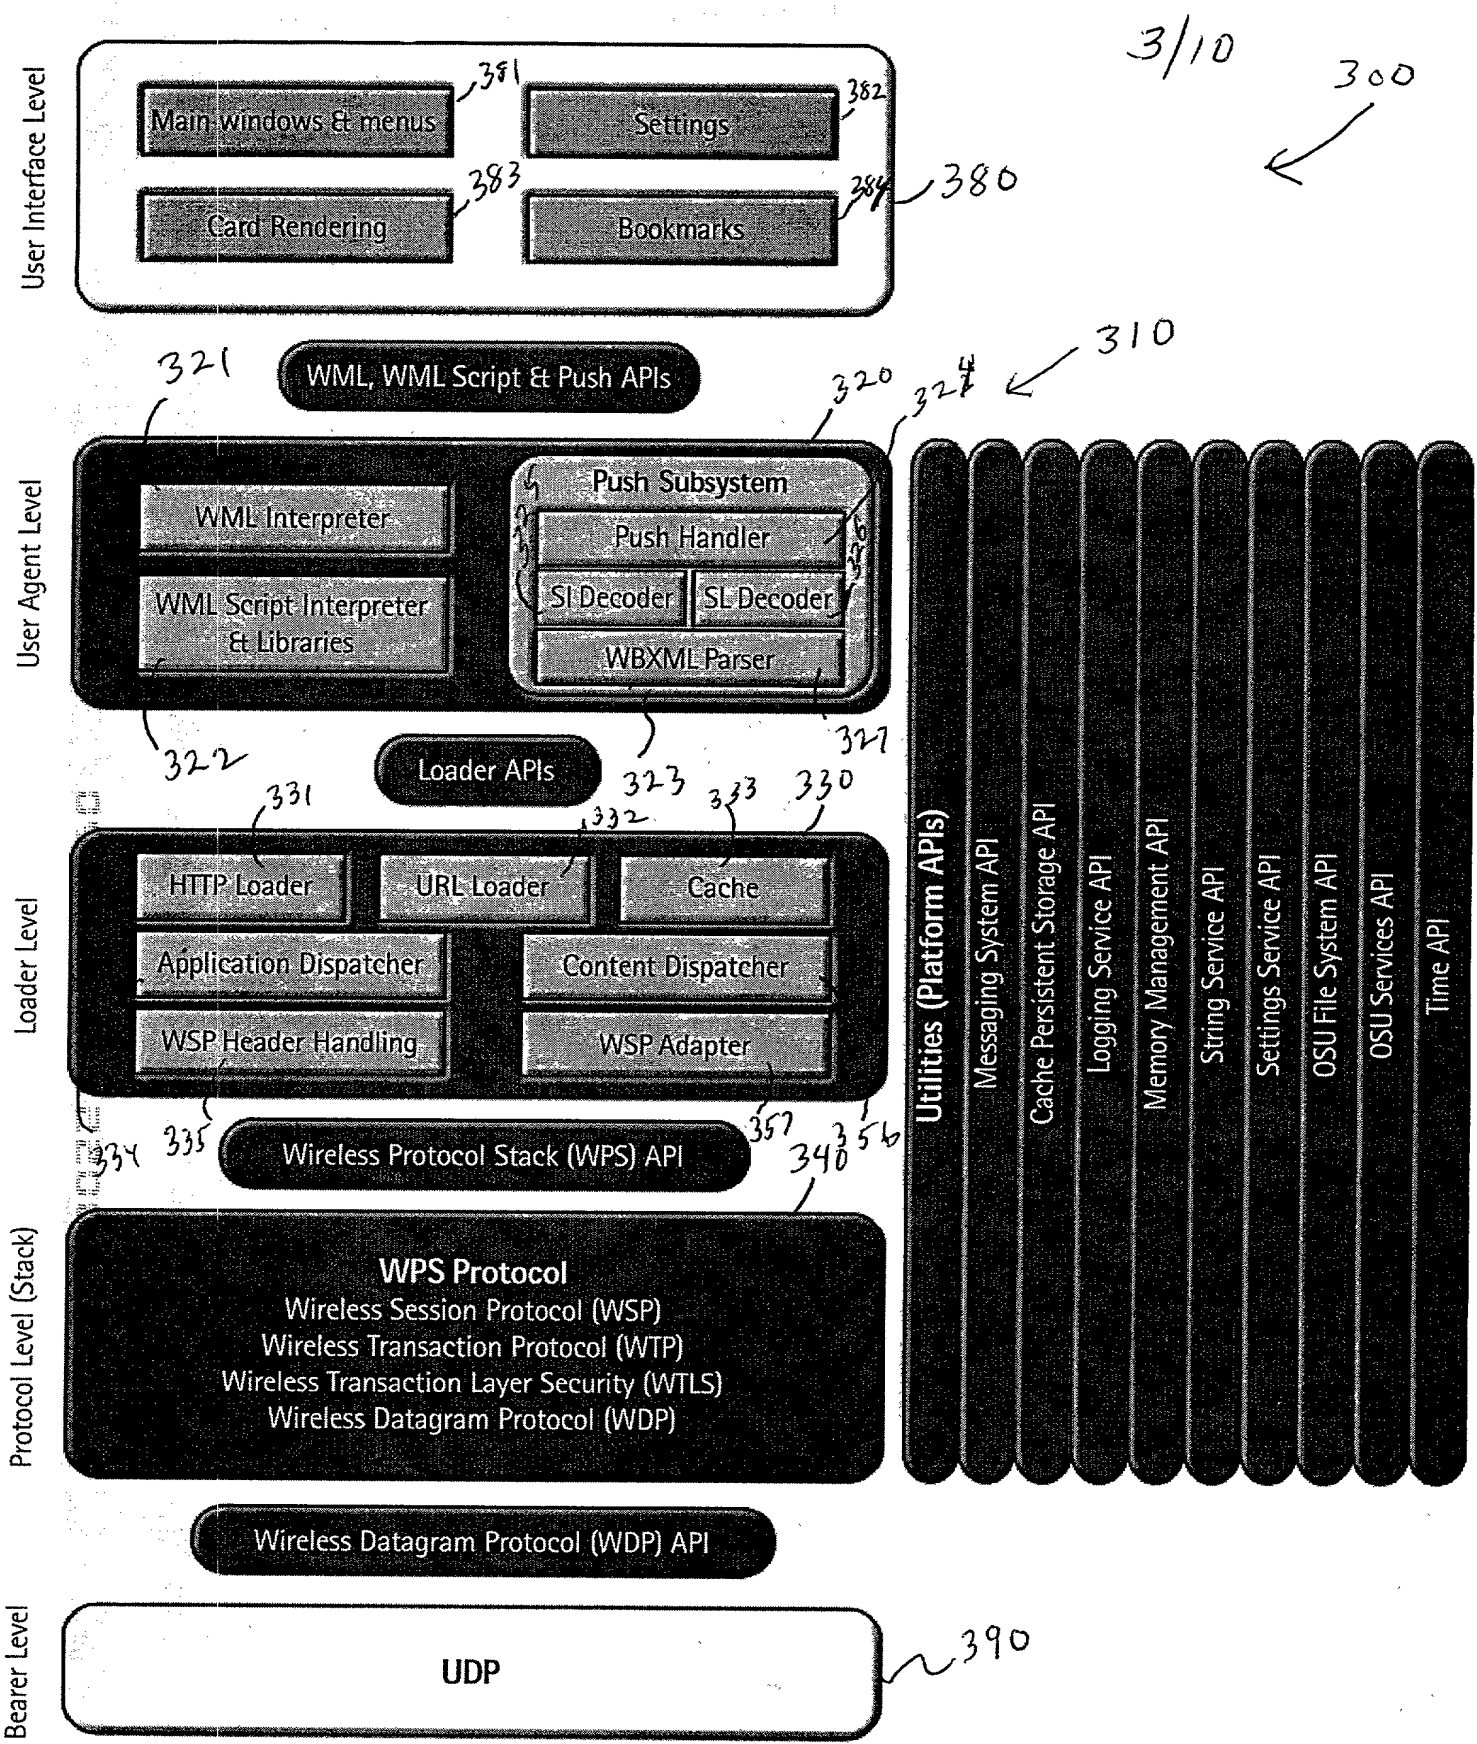

■ Core Browser Components  
□ Reference Implementation

FIG. 3

4/10

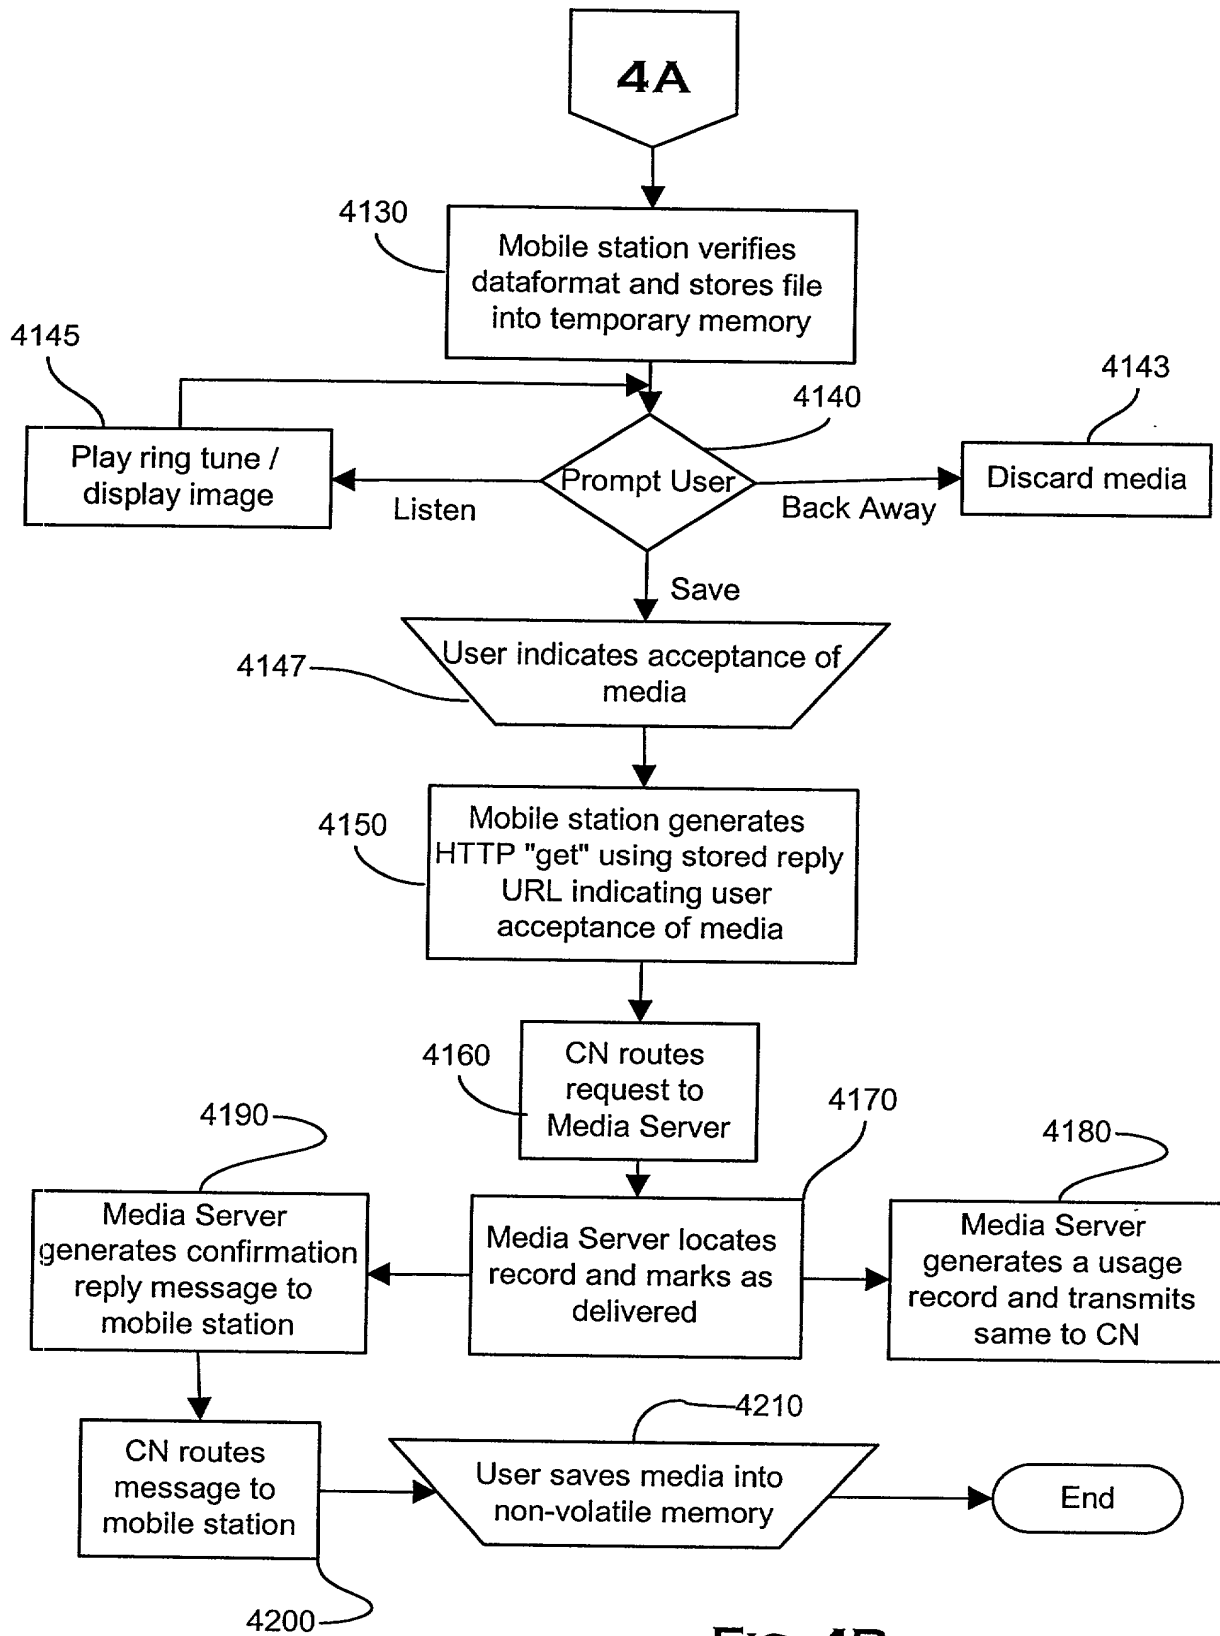


FIG. 4B

5/10

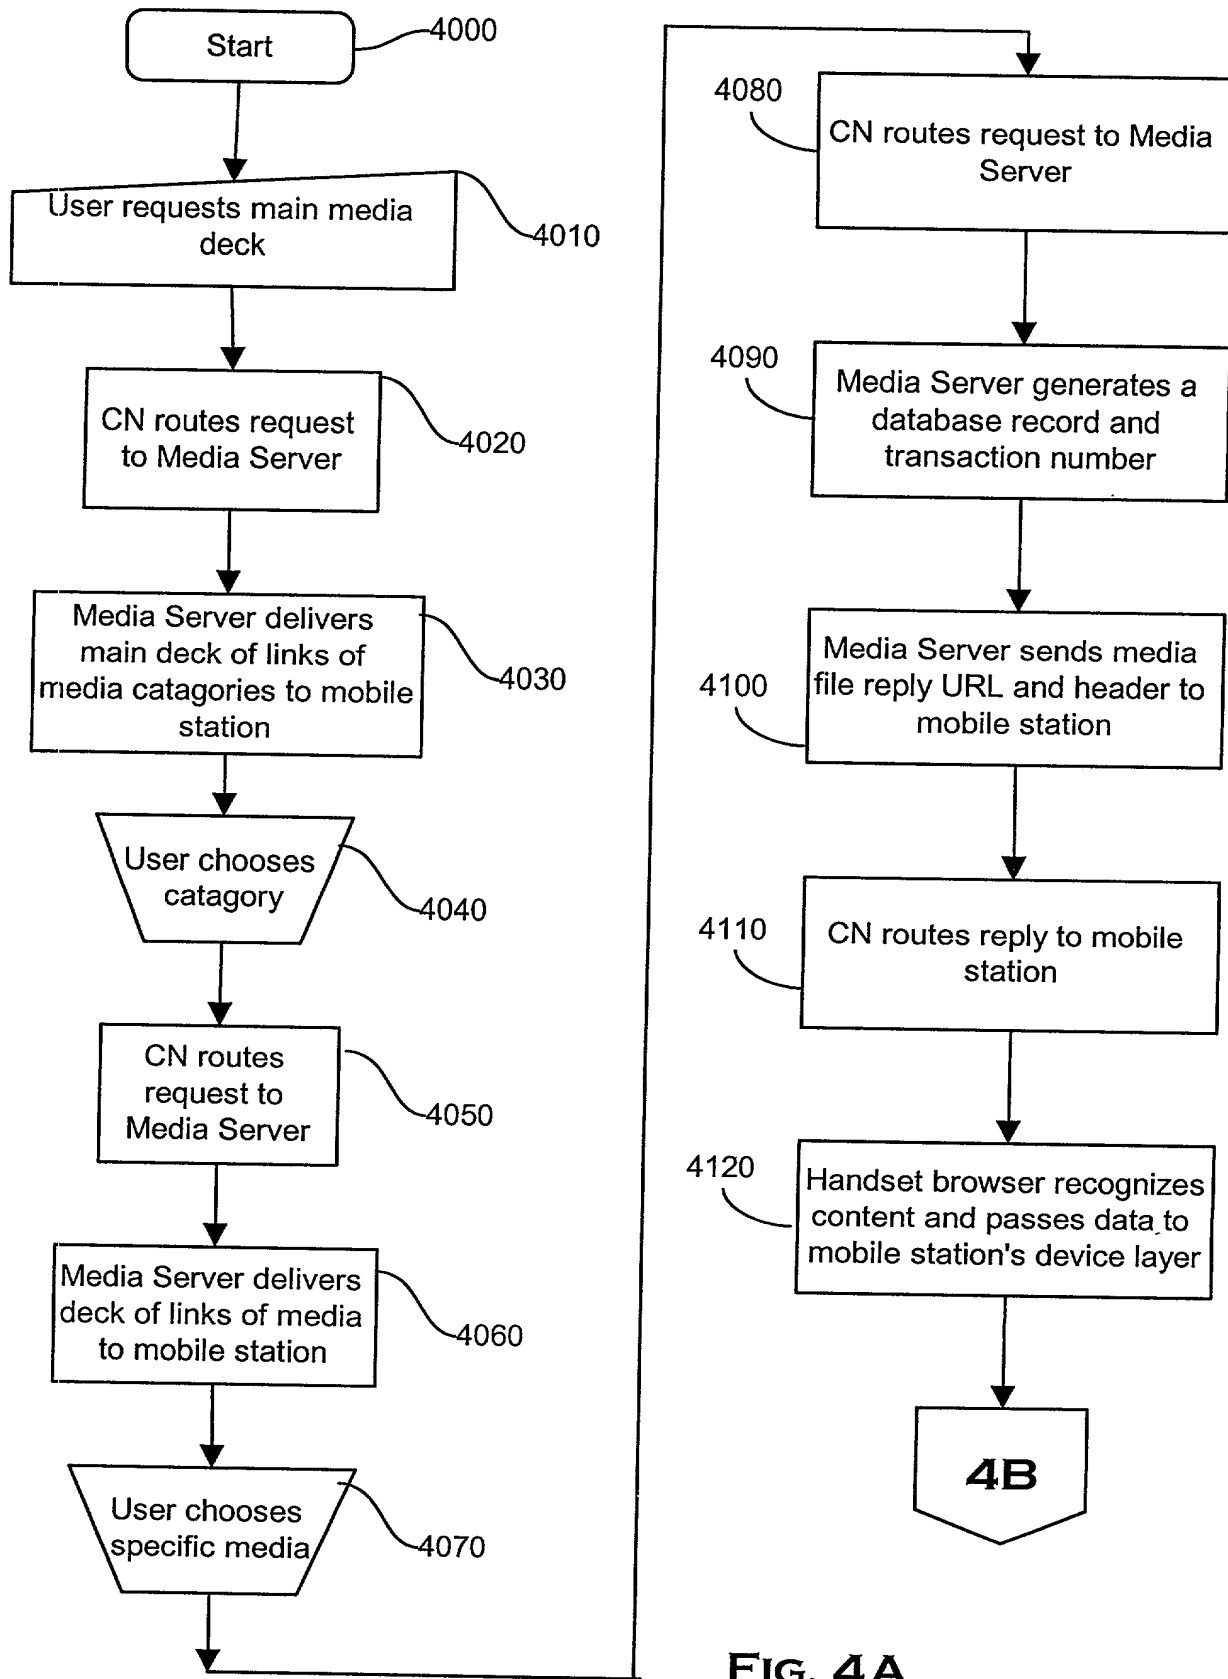


FIG. 4A

6/10

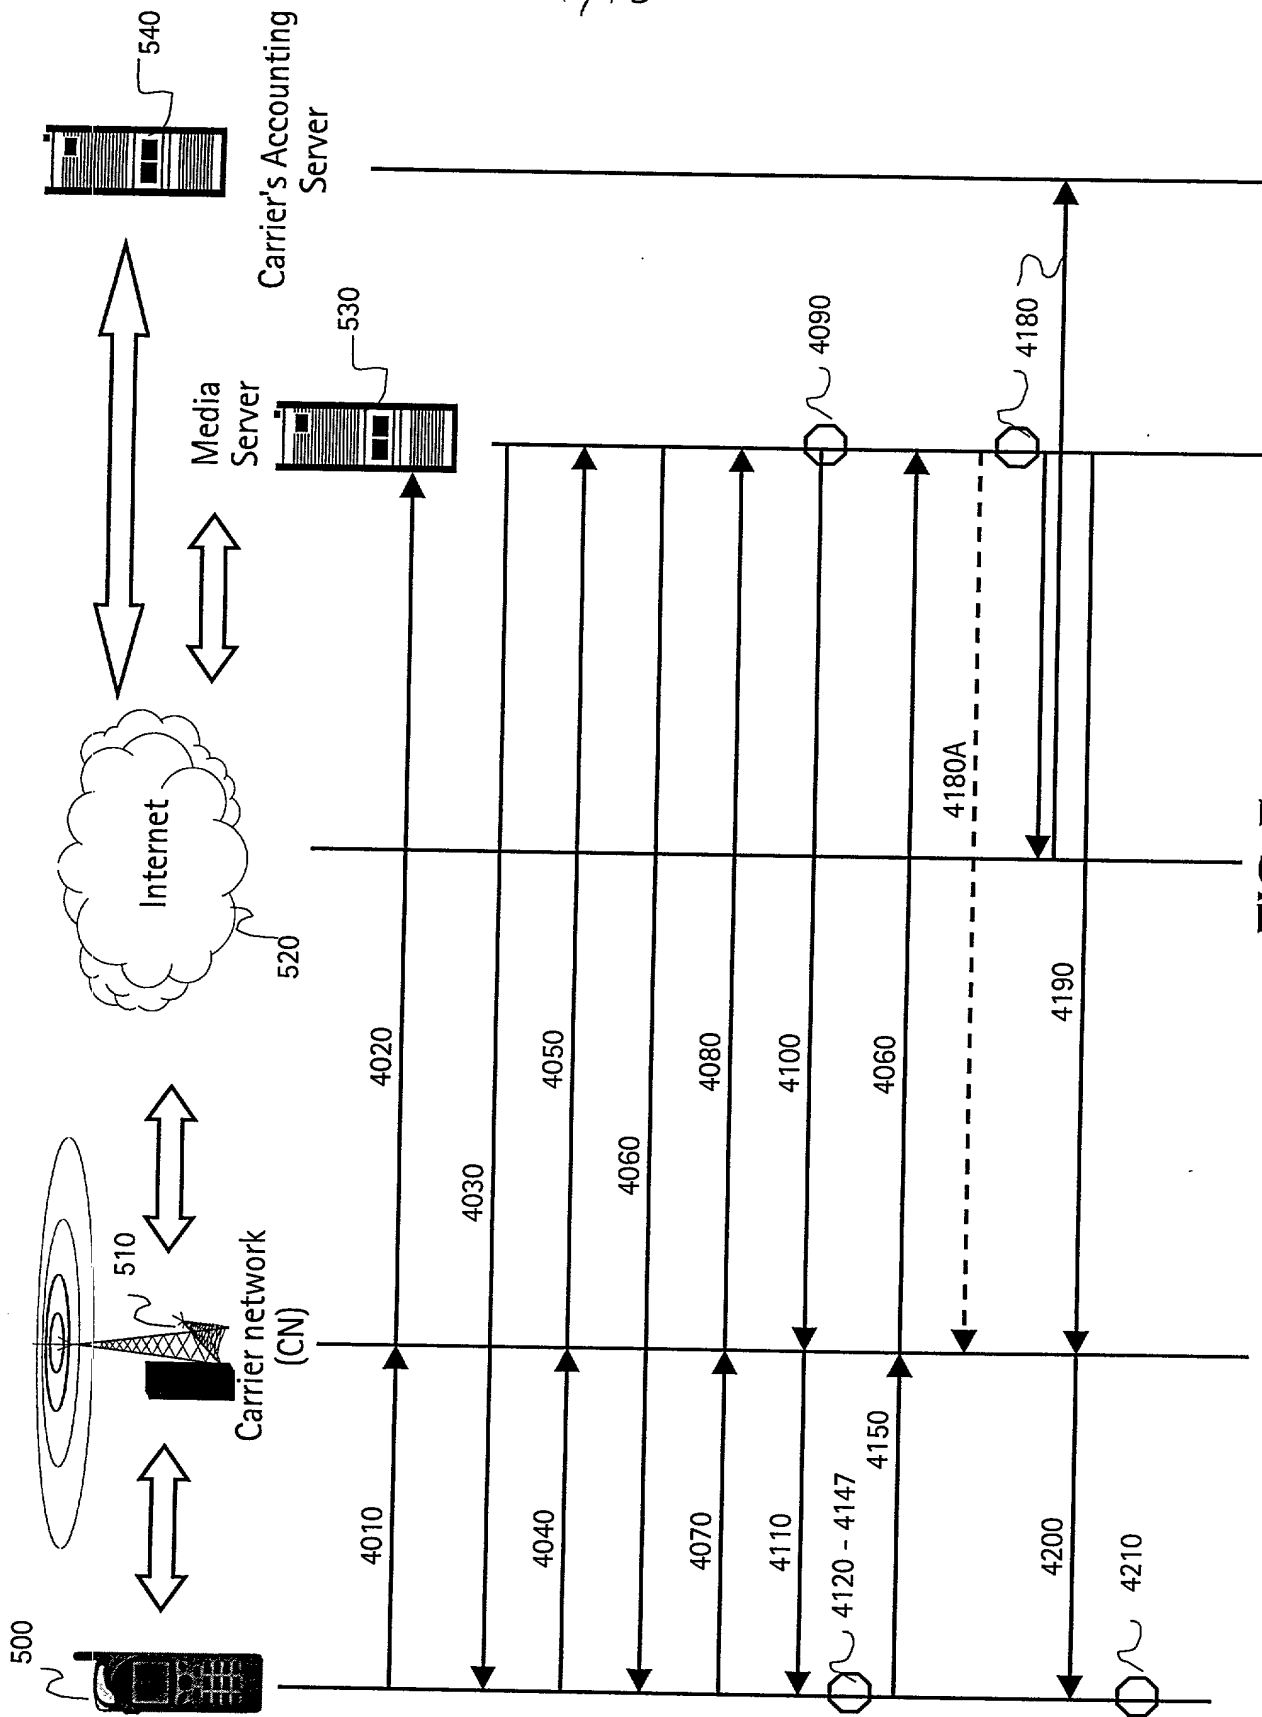


FIG. 5

7/10

100

130



110

601

120A

145

FIG. 6A

8/10

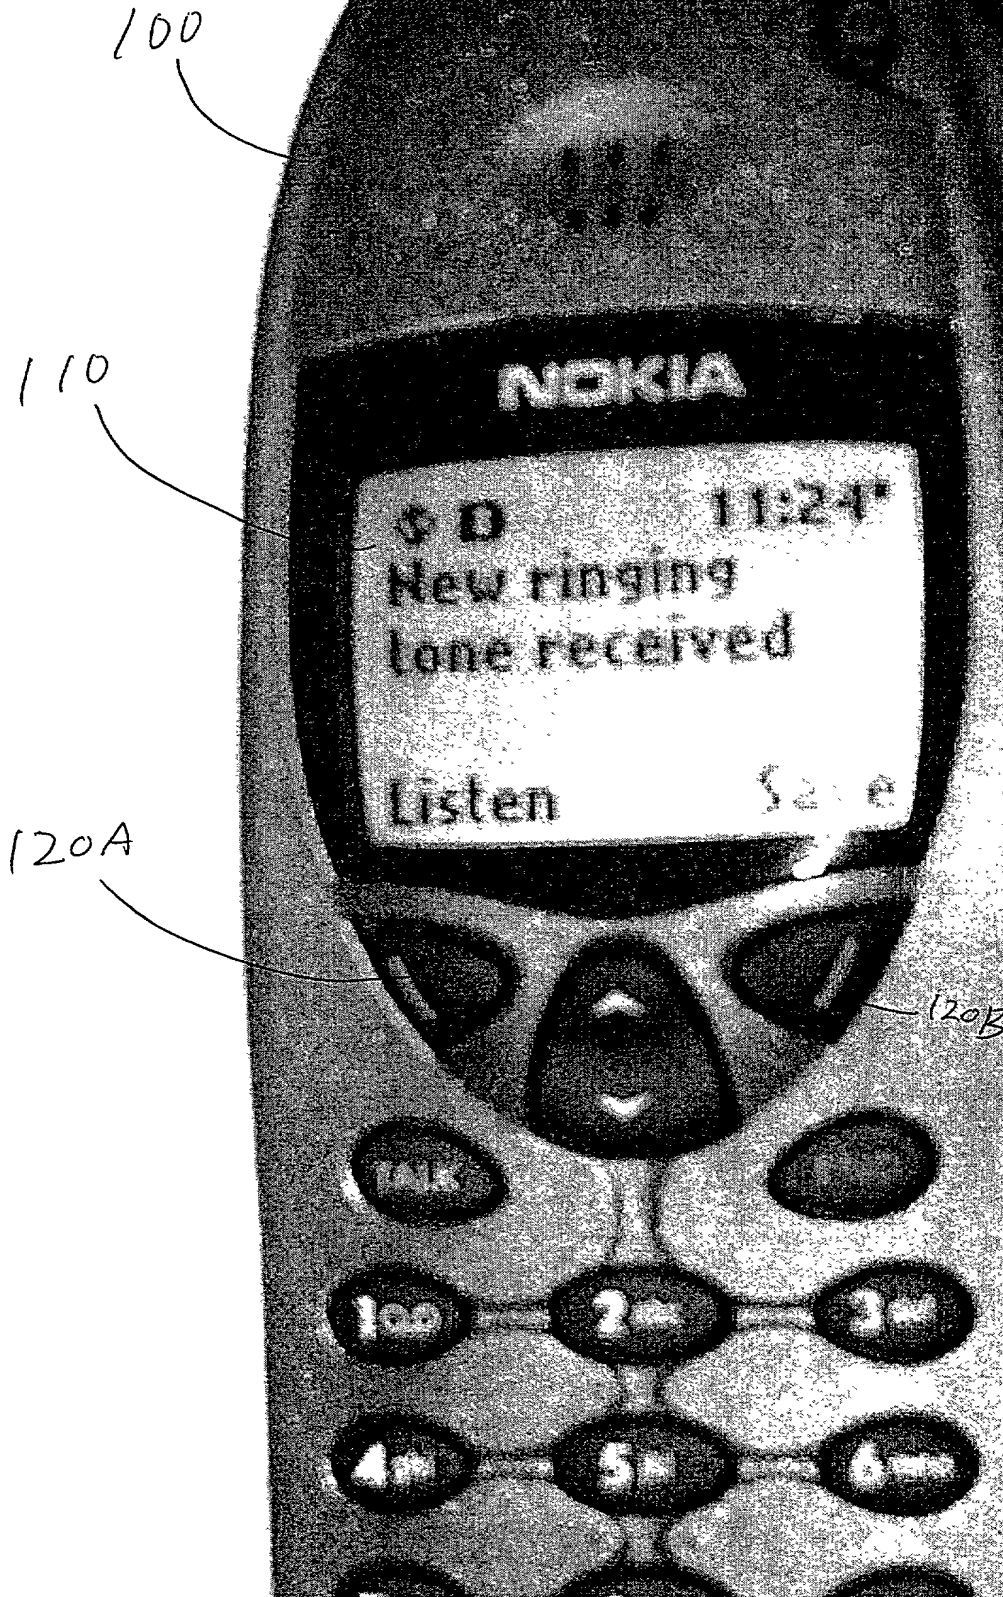


FIG. 6B



9/10

100

110

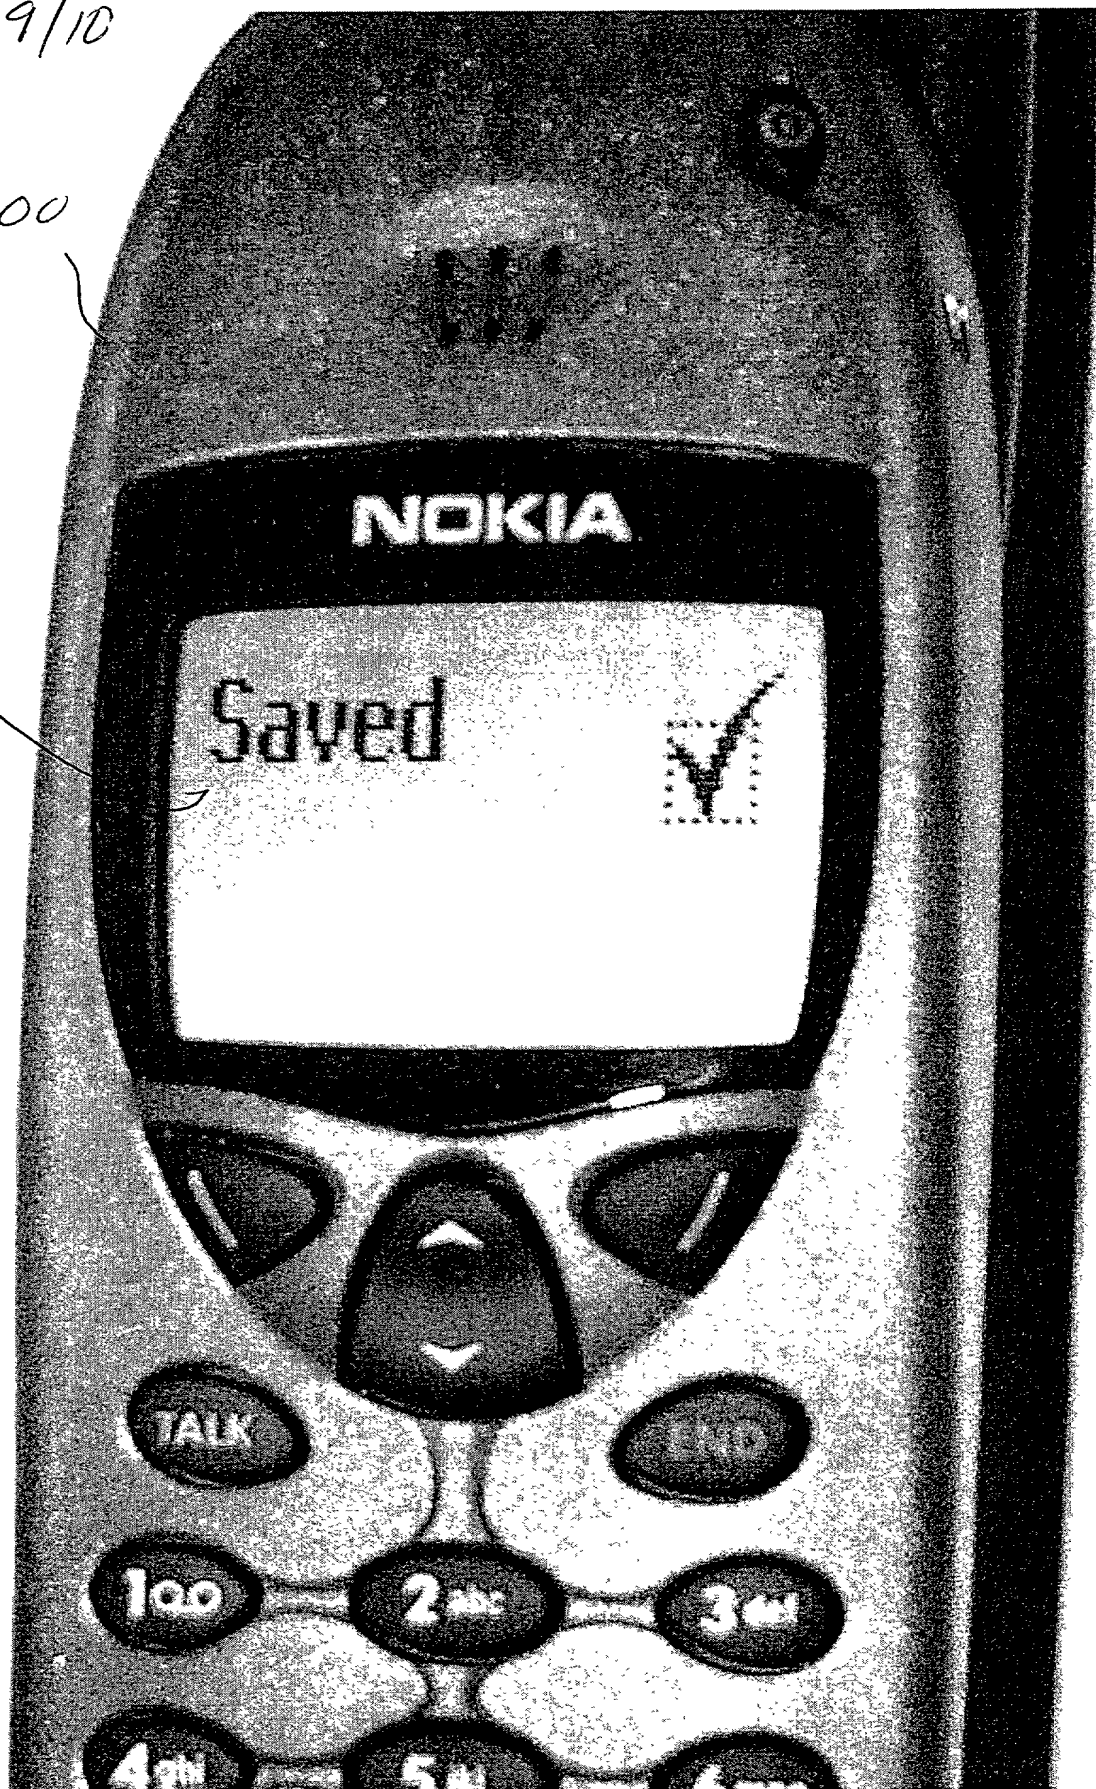


FIG. 6C

10/10

4.

#### TONE ACTIVATION

UI sends event of wanted tone sequence to tone task via tone functions /3/. Tone task receives tone event, tone type / tone class and tone value coded to one event. Structure of event is:

- bits 31 - 24 not used
- bits 23 - 16 for tone type / tone class (depending on tone event)
- bits 15 - 8 for tone value
- bits 7 - 0 for tone event

The following figure clarifies the tone activation:

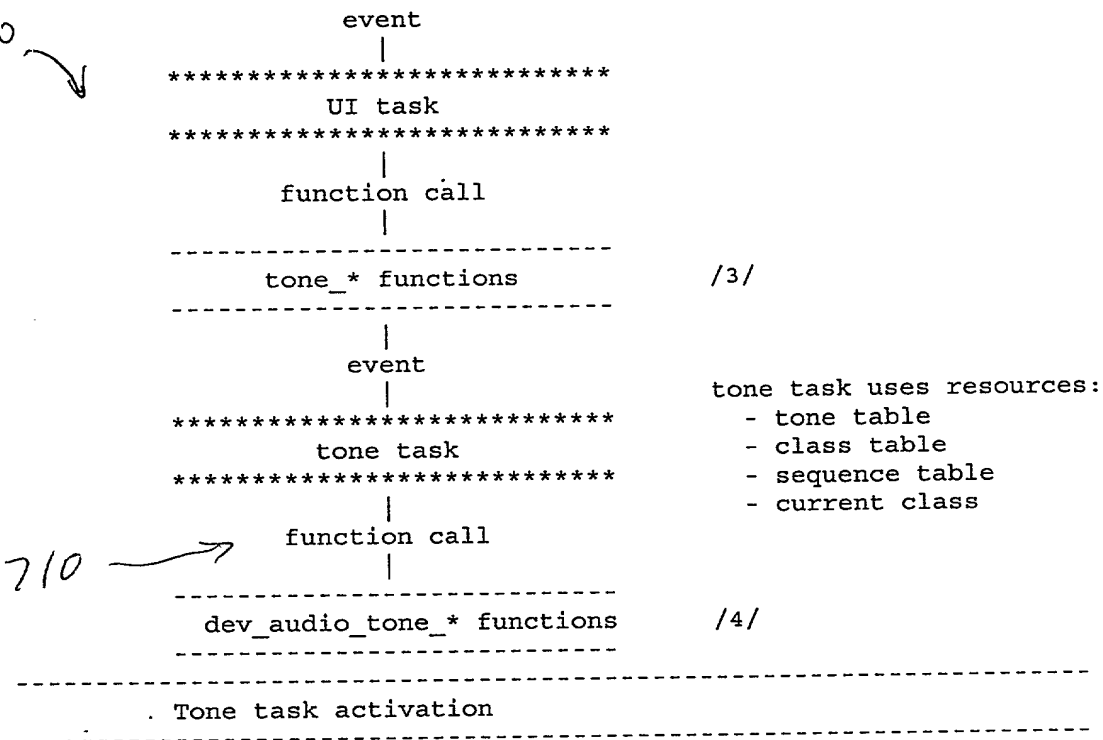


Figure 7